

2/7

FIG 2

B-channel:

PBX downlink PC uplink

D-channel:

PBX downlink PC uplink

SIG PROT

IC-channel:

B-channel PC uplink --> TE


D-channel TE uplink --> PC CTRL:

PC control for BFL functions

SIG PROT

```
\begin{array}{|c|c|c|c|c|}\hline 2B + D \\ BRI = U_{p0}/E \\ \hline \\ IOM-2 \\ \hline \\ USB \\ \end{array}
```

The first of the f

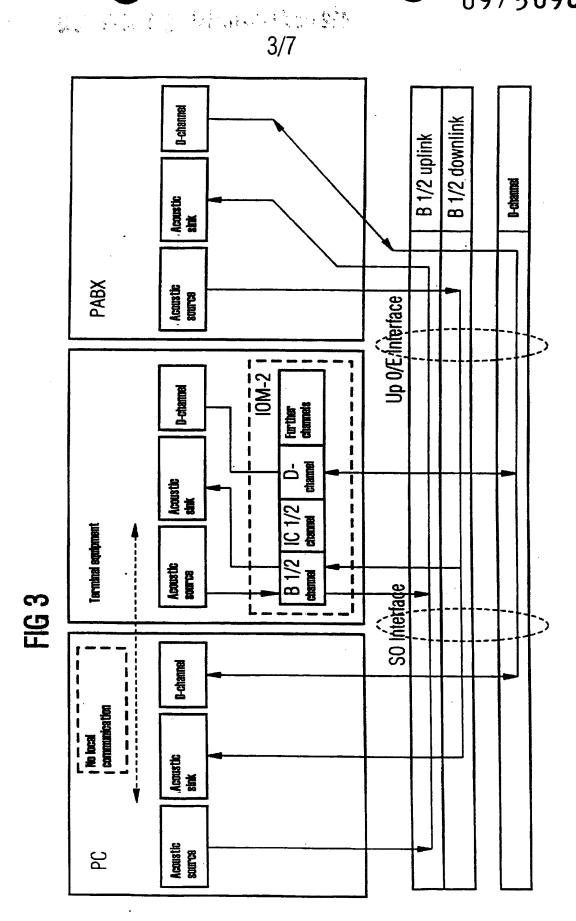

their controllers and controllers are their their controllers and their controllers and their controllers and




FIG 4

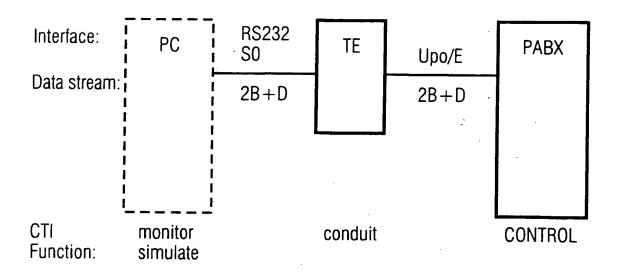


FIG 5

